



STANDARD CONSTRUCTION

FRAME:

6063T5 EXTRUDED ALUMINUM
NOMINAL WALL THICKNESS OF 0.081"
UNIVERSAL C-CHANNEL FRAME

BLADES:

6063T5 EXTRUDED ALUMINUM
NOMINAL WALL THICKNESS OF 0.081"
SPACED AT APPROX. 4.5" CENTERS

BEARINGS:

PERMANENTLY LUBRICATED NYLON BUSHING,
PRESS FIT INTO FRAME

GASKET:

1" x 1/4" FOAM GASKET

OPERATOR MOTOR:

HIGH-TORQUE ACTUATOR 24VAC (STANDARD)
110VAC (OPTIONAL)

FINISH:

MILL ALUMINUM

SIZE:

MINIMUM 12" W X 12" H


MAXIMUM DAMPER SIZE WITH SINGLE

MOTOR:

60" W X 48" H

FEATURES:

EXTRUDED ALUMINUM PROVIDES SUPERIOR
DURABILITY AND RESISTS CORROSION.
SOLID HARDWARE ALLOWS SMOOTH
OPERATION.

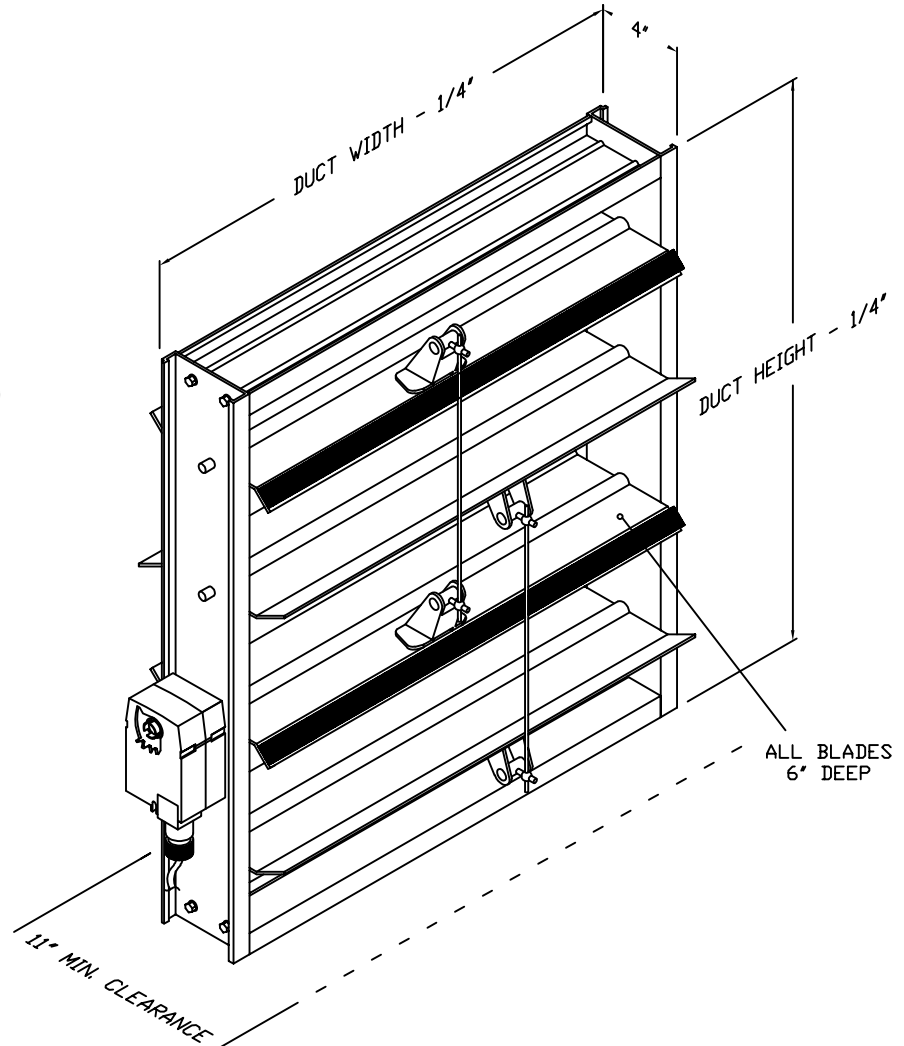

JOB NAME:
LOCATION:
ARCHITECT:
ENGINEER:
CONTRACTOR:
CONTACT GRILLE TECH INC. FOR ADDITIONAL INFORMATION OR WITH SPECIAL REQUIREMENTS.
5101 NW 36TH AVE MIAMI, FL 33142 PHONE: 305-537-0053 FAX: 305-537-0064
WEB: WWW.GRILLETECHINC.COM EMAIL: SALES@GRILLETECHINC.COM

MOBD

MOTORIZED OPPOSED BLADE DAMPER
POWER OPEN, SPRING CLOSE

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



DRAWN BY:	MR	DATE:	8/02/17	SCALE:	NOT TO SCALE
CHECKED BY:	IG	DATE:	8/31/17	REVISION:	8/02/17

DRAWING NO.
MOBD