

STANDARD CONSTRUCTION
FRAME:

6063T5 EXTRUDED ALUMINUM.
NOMINAL WALL THICKNESS OF 0.081"
UNIVERSAL C-CHANNEL FRAME.

BLADES:

6063T5 EXTRUDED ALUMINUM.
NOMINAL WALL THICKNESS OF 0.081"
SPACED AT APPROX. 6" CENTERS

BEARINGS:

PERMANENTLY LUBRICATED OILITE BRONZE, PRESS FIT
INTO FRAME.

OPERATOR SHAFT:

1/2" DIAMETER PLATED STEEL SHAFT EXTENDS 3" OR 6"
PAST FRAME.

FINISH:

MILL FINISH

SIZE:

MINIMUM SIZE: 12"W x 12"H

MAX DAMPER SIZE:




SINGLE: 48"W x 60"H
MULTIPLE HORIZONTAL: 96"W x 60"H
MULTIPLE VERTICAL: 48"W x 120"H

OPTIONS:

MOTOR MOUNTING (FACTORY FURNISHED OR BY
OTHERS)
1/2" DIAMETER OPERATOR (EXTENDS 6" BEYOND FRAME)

FEATURES:

EXTRUDED ALUMINUM PROVIDES SUPERIOR DURABILITY
AND RESISTS CORROSION.
SOLID HARDWARE ALLOWS SMOOTH OPERATION

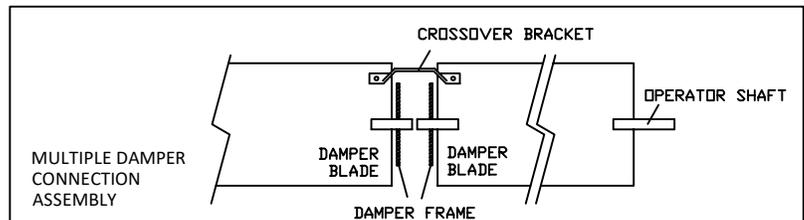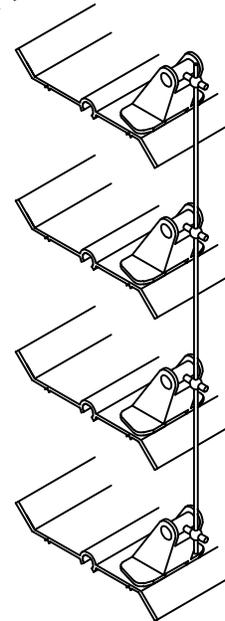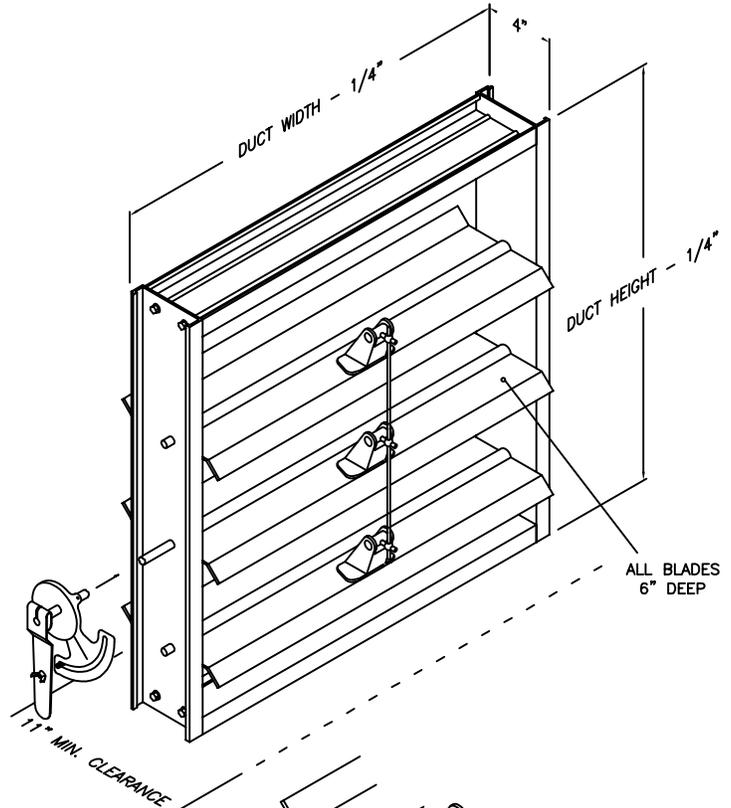

JOB NAME:
LOCATION:
ARCHITECT:
ENGINEER:
CONTRACTOR:
<p>CONTACT GRILLE TECH INC. FOR ADDITIONAL INFORMATION OR WITH SPECIAL REQUIREMENTS.</p> <p>5101 NW 36TH AVE MIAMI, FL 33142 PHONE: 305-537-0053 FAX: 305-537-0064</p> <p>WEB: WWW.GRILLETECHINC.COM EMAIL: SALES@GRILLETECHINC.COM</p>

PBD

PARALLEL BLADE DAMPER