


SCF-3

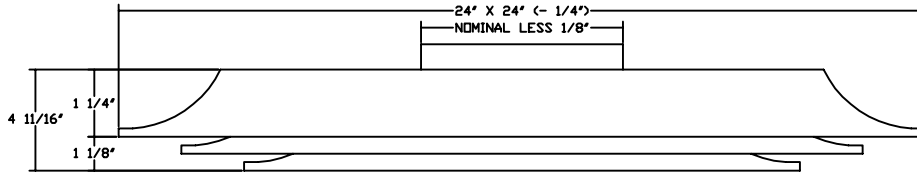


THE SCF-3 IS A HIGH CAPACITY, THREE SQUARE CONE DIFFUSER FOR 24" X 24" T-BAR INSTALLATION. IT IS MANUFACTURED WITH DQSK STEEL TO GIVE SUPERIOR DURABILITY AND STRENGTH. THE FINISH IS 100% POLYESTER AXALTA POWDER COATING (SKY WHITE). THE MODEL SCF-3 IS AVAILABLE IN 6", 8", 10", 12" AND 14" COLLAR DIAMETERS. IT PROVIDES A HORIZONTAL 360 DEGREE AIR PATTERN WITH EXCEPTIONAL PERFORMANCE IN ALL CFM RANGES, INCLUDING VARIABLE AIR VOLUME SYSTEMS. A SMA FRAME IS ALSO AVAILABLE FOR SURFACE MOUNT APPLICATIONS.

STEEL DAMPERS (MODEL BCD OR OBR) ARE ACCESSIBLE THROUGH THE FACE AND ARE AVAILABLE IN ALL DIAMETERS. STANDARD FINISH ON MODEL BCD: BROWN AND MODEL OBR: WHITE.

ADDITIONAL ACCESSORIES ARE AVAILABLE. SEE PAGE SCF/EPR01A.

SCF-4

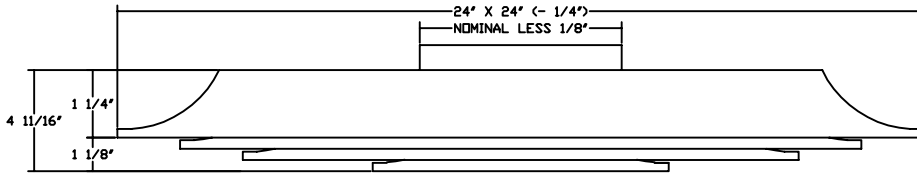


THE SCF-4 IS A HIGH CAPACITY, FOUR SQUARE CONE DIFFUSER FOR 24" X 24" T-BAR INSTALLATION. IT IS MANUFACTURED WITH DQSK STEEL TO GIVE SUPERIOR DURABILITY AND STRENGTH. THE FINISH IS 100% POLYESTER AXALTA POWDER COATING (SKY WHITE). THE MODEL SCF-4 IS AVAILABLE IN 6", 8", 10", 12" AND 14" COLLAR DIAMETERS. IT PROVIDES A HORIZONTAL 360 DEGREE AIR PATTERN WITH EXCEPTIONAL PERFORMANCE IN ALL CFM RANGES, INCLUDING VARIABLE AIR VOLUME SYSTEMS. A SMA FRAME IS ALSO AVAILABLE FOR SURFACE MOUNT APPLICATIONS.

STEEL DAMPERS (MODEL BCD OR OBR) ARE ACCESSIBLE THROUGH THE FACE AND ARE AVAILABLE IN ALL DIAMETERS. STANDARD FINISH ON MODEL BCD: BROWN AND MODEL OBR: WHITE.

ADDITIONAL ACCESSORIES ARE AVAILABLE. SEE PAGE SCF/EPR01A.

STEEL. FIRE RATED DAMPER (UL R.10967). LAY-IN FACE.

SCF616

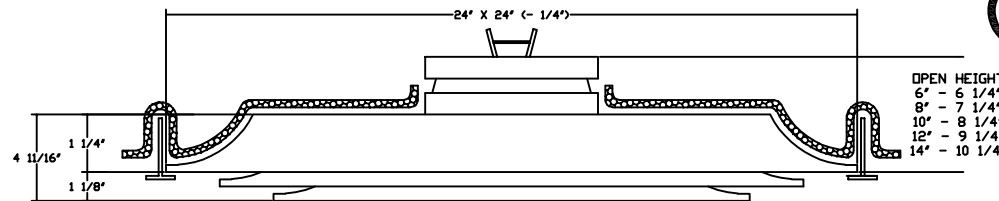

UNDERWRITERS LABORATORIES INC.
CLASSIFIED
CEILING RADIATION DAMPER
TESTED IN ACCORDANCE WITH UL 263

THE SCF616 IS A HIGH CAPACITY, THREE SQUARE CONE DIFFUSER FOR 24" X 24" T-BAR INSTALLATION. IT IS MANUFACTURED WITH DQSK STEEL TO GIVE SUPERIOR DURABILITY AND STRENGTH. IT IS EQUIPPED WITH A NON-ASBESTOS FIRE BLANKET AND CEILING RADIATION DAMPER. THE FINISH IS 100% POLYESTER AXALTA POWDER COATING (SKY WHITE). THE MODEL SCF616 IS AVAILABLE IN 6", 8", 10", 12" AND 14" COLLAR DIAMETERS. IT PROVIDES A HORIZONTAL 360 DEGREE AIR PATTERN WITH EXCEPTIONAL PERFORMANCE IN ALL CFM RANGES, INCLUDING VARIABLE AIR VOLUME SYSTEMS. THE SCF616 IS EQUIPPED WITH UL CLASSIFIED FIRE DAMPER (FILE R.10967).

SCF-3, SCF-4, SCF616

SQUARE FACE/ROUND NECK DIFFUSER
PRODUCT DESCRIPTION

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

DRAWN BY:	MR	DATE:	6/08/17	SCALE:	NOT TO SCALE	DRAWING NO.
CHECKED BY:	IG	DATE:	6/30/17	REVISION:	6/08/17	

SC1A