PRODUCT SPECIFICATIONS

PAGE 1 OF 1

STANDARD CONSTRUCTION

FRAME:

EXTRUDED ALUMINUM FRAME IS ASSEMBLED USING CORNER CLIPS TO ASSURE HAIRLINE MITERED CORNERS.

BLADES:

TEARDROP SHAPE ROLL FORMED ALUMINUM. EACH BLADE IS INDIVIDUALLY ADJUSTABLE (WITHOUT USE OF SPECIAL TOOLS).

BLADES ARE SPACED 3/4" ON CENTERS AND ARE MOUNTED ON PRESSURE FITTED POLYPROPYLENE RETAINERS TO ASSURE A QUIET AND RIGID ASSEMBLY.

MODEL EH: HORIZONTAL BLADES MODEL EV: VERTICAL BLADES

GASKET:

RUBBER GASKET IN COMPLIANCE WITH FLORIDA STATE BUILDING CODE.

OPTIONAL:

DAMPER: GALVANIZED STEEP OPPOSED BLADE DAMPER IS EASILY ADJUSTED THROUGH FACE.

* SEE SUBMITTAL "OBD" FOR MORE DETAILS INSECT SCREEN: (NOT RECOMMENDED WITH DAMPER OPTION)


FINISH


SKY-WHITE (STANDARD) MILL FINISH (OPTIONAL)

AXALTA SKY-WHITE 100% POLYESTER POWDER COATING GIVES AN ATTRACTIVE BRIGHT WHITE FINISH AND PROVIDES ADDITIONAL PROTECTION FROM AGING AND WEAR.

SIZES:

4" x 6" MIN 36" x 48" MAX

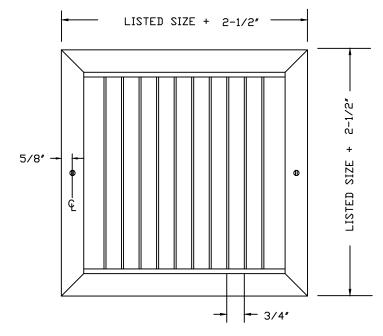

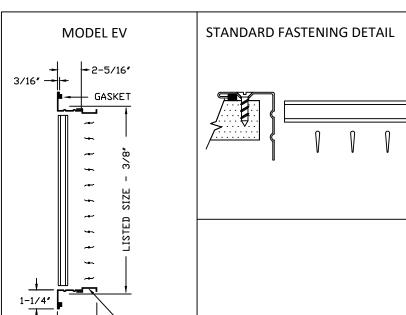

DAMPER (OPTIONAL)

3-13/16"

JOB NAME: LOCATION: ARCHITECT: ENGINEER: CONTRACTOR: CONTACT GRILLE TECH INC. FOR ADDITIONAL INFORMATION OR WITH SPECIAL REQUIREMENTS.

5101 NW 36TH AVE MIAMI, FL 33142 PHONE: 305-537-0053 FAX: 305-537-0064

WEB: WWW.GRILLETECHINC.COM EMAIL: SALES@GRILLETECHINC.COM

MODEL EH/EV

ALUMINUM SINGLE DEFLECTION SUPPLY

Grille tech inc.

| DATE | 7/03/17 | SCALE | DATE | DATE | T/31/17 | REVISION 7/03/17 | EH/EV

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.